ALSAFLOOR



LAMINATE FLOORING 2019

Introduction

ALSAPAN, a family-run company located in Alsace, in eastern France, was founded in 1972 by Joseph Strub, a carpenter by trade. It now operates 5 manufacturing facilities in France, producing millions of kit furniture units and worktops every year.

Alsapan has been making laminate flooring since 1995, both under its own brand and under retailer private brands, to meet the requirements of its various markets. The only French manufacturer in the sector, the company offers a comprehensive choice of products in its ranges, with some 60 rustic and contemporary patterns sold throughout the world.

Alsapan's in-house research has, over the past few years, focused on coming up with innovative installation options, to allow consumers to personalise their interiors at will, as featured by the Unusuals range.

Consumers can now mix and match using planks of different widths and lengths:

• in a more bohemian style with planks of different widths

• or in the grand tradition of a herringbone pattern

We are continually renewing our creative ideas and you will find our latest designs in the new collection, which includes 8 new patterns, ranging from the highly original 550 Trade Wind to the stylishly contemporary 557 Black Pine. You're sure to find the pattern that matches your needs!

All ALSAFLOOR flooring features our 5G® fast and simple fitting system.

And this year, on top of our wide choice of laminate flooring, ALSAPAN has invested in a new rigid vinyl flooring production line!

Don't hesitate to get in contact with our sales representative to find out more about our VINYL flooring.

We hope and trust you will enjoy the 2019 collection and that we will soon be able to include you among our favoured customers.



CÉCILE CANTRELLE

President

A leading French manufacturer

An environmentally-conscious company

Innovation, research, and eco-responsibility have always been part and parcel of our corporate DNA. Our innovations aim to reduce wood consumption and minimise our products' impact on the environment.

Our R&D sets out to continually heighten customer satisfaction and it is through you that we can show consumers our collections of easy-living products, within reach of all budgets.

All Alsapan flooring products are **PEFC™ certified.** The wood used in our flooring is sourced from sustainably-managed forests - we never use exotic woods or wood from tropical forests. Our production facility is geographically close to our raw material suppliers and retail outlets, which allows us to reduce shipping distances and CO₂ emissions. Our Marlenheim facility is exemplary in its **environmentally-responsible actions**, which help maintain our planet's natural resources.

Its roof is fitted with solar panels,

Employees are actively seeking to reduce paper consumption and to recycle it,

The plant uses production waste products as an energy source for heating the buildings and the machines

A+, for a healthy habitat!

Introduced on 1 January 2012, the **health safety labelling** on product packaging gives consumers details of the amount of volatile substances released into the interior air by flooring and is ranked on a scale from Class A+ (very low emissions) to Class C (high level of emissions).

ALSAFLOOR products are ranked A+, with a formaldehyde emission rate of well under 10 μ g/(m² x h), based on tests performed by an independent laboratory.







'Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).



Black and White



161 White pine



410 Alpes' oak



512 White fjord



553 Black charleston



544 Wood stain oak



557 Black pine












542 Aronia oak











Naturals



435 Jefferson



514 Namur



450 Nature oak



529 Almond oak



456 Provence oak



535 Praline oak





441 Lady oak



471 Sunset



Associated colours



Grey



153 Celtic oak



536 Linen oak



157 Guérande



448 Grey oak



183 Everest



517 White limed grey





437 Grey building



619 Sardinia oak









Associated colours



Dark colours



140 Congo oak



520 Chocolate walnut



420 Taza oak



528 Chestnut oak



447 Malt oak



622 Balearic oak















620 Corsica oak



625 Corfou









Contents

Pages 9 to 11

THE UNUSUALS

Page 10 RANDOM WIDTH PATTERN

Page 11 HERRINGBONE

Pages 12 to 17

12 mm

Page 13 FORTE

Pages 14 & 15 SOLID PLUS

Page 16 SOLID CHIC

Page 17 SOLID MEDIUM

Pages 18 to 24

8 mm

Page 19 OSMOZE MEDIUM

Pages 20 & 21 OSMOZE
Pages 22 & 23 CLIP 400

Page 24 VINTAGE

Pages 25 to 35 PATTERNS

Page 36 STRUCTURES

Page 37 **PRODUCT RANGES**

Pages 38 & 39 **TECHNICAL FEATURES**

Page 40 PICTOGRAMS

Pages 41 to 43 **TO GO FURTHER**

Page 41 THE ACCESSORIES

Page 42 ENGINEERED WOOD

Page 43 VINYL - IDÉAL

THE UNUSUALS



RANDOM WIDTH PATTERN | HERRINGBONE







RANDOM WIDTH PATTERN

MAKE UNIQUE PATTERNS BY MIXING PLANK WIDTHS



A plank width for every room in the house, which you can combine:

- SOLID PLUS with a width of 214 mm: for larger rooms.
- · SOLID CHIC with a width of 172 mm: sophisticated and smart, it goes anywhere in the home.
- · SOLID MEDIUM with a width of 122 mm: a slim, elegant plank suitable for smaller rooms.















rustic texture



matt wood structure



In-Registered texture



In-Registered and heliochrome



435

N

619
















542

HERRINGBONE

REINVENTED CLASSIC INSTALLATION

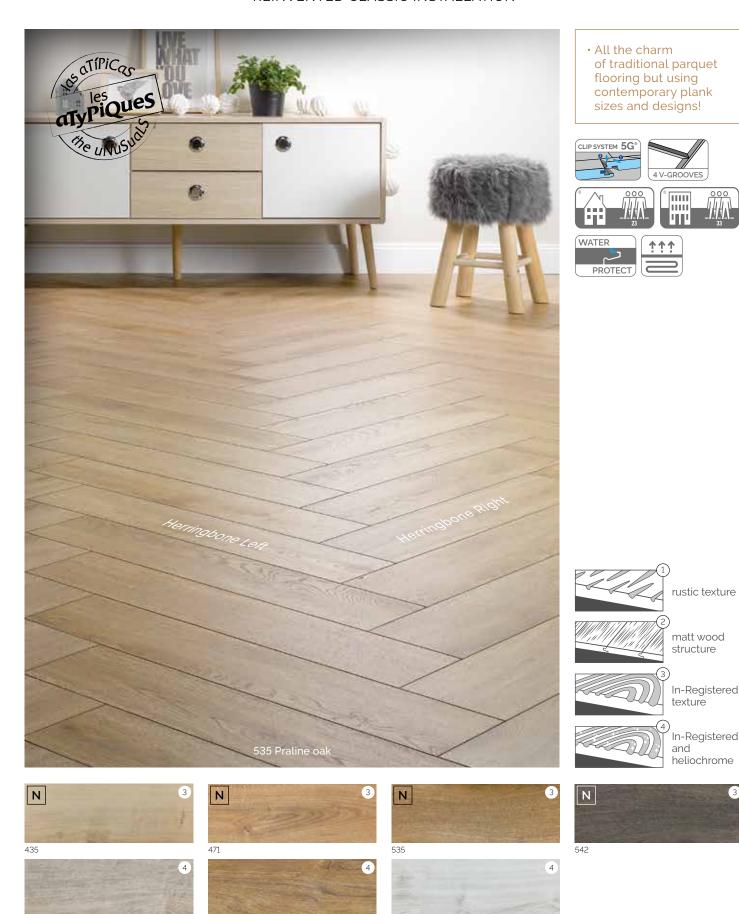


support: hdf - wp

width: 143 mm

length: 640 mm

TECHNICAL FEATURES

12 mm

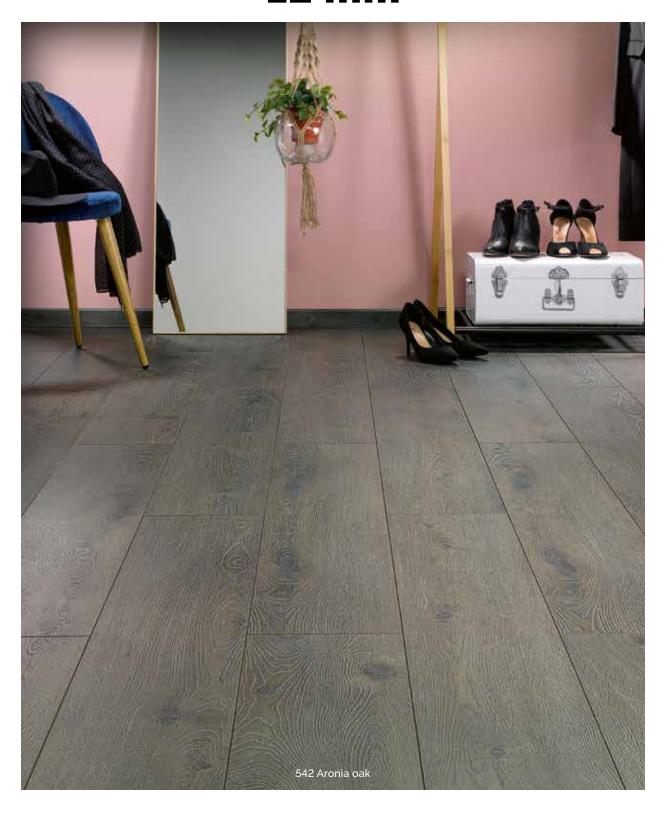

FORTE | SOLID PLUS | SOLID CHIC | SOLID MEDIUM








FORTE

A PLANK 214 MM WIDE, WITH NO BEVELS

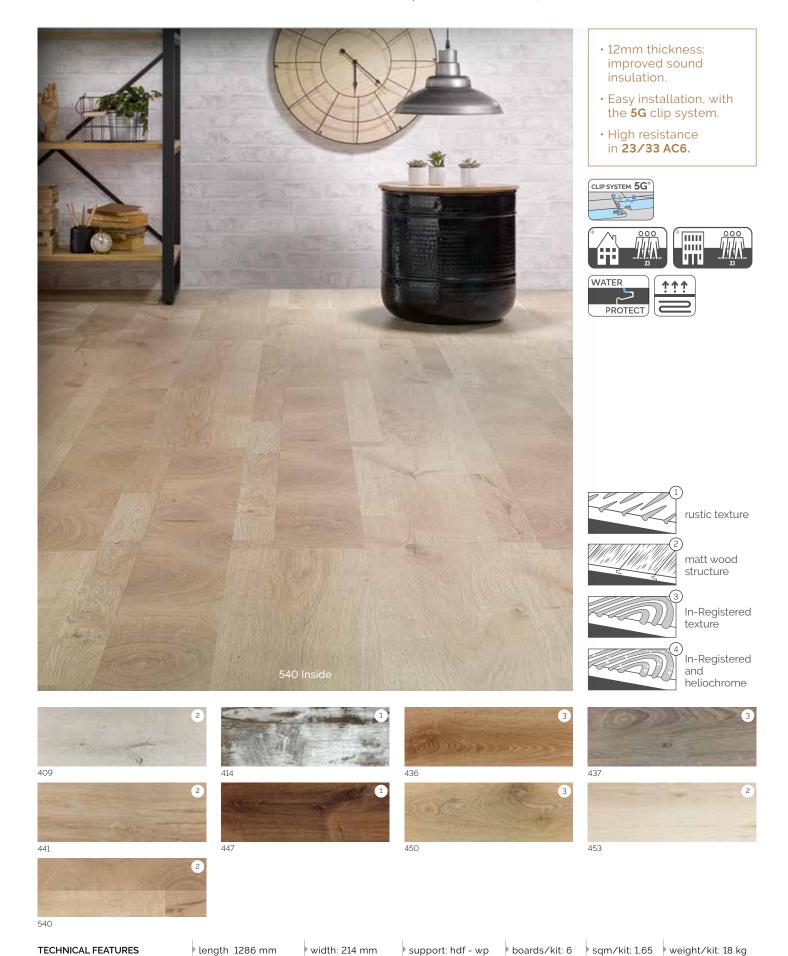


SOLID PLUS

AN IN-REGISTERED FINISH AND 4 BEVELS GIVE A HIGHLY REALISTIC PARQUET EFFECT!



- A **214 mm** plank width, suitable for large rooms.
- Easy installation, with the **5G** clip system.
- High resistance in 23/33 AC6
- Bevelled on the **4 sides**.
- 12mm thickness: improved sound insulation.





rustic texture








matt wood structure



In-Registered and heliochrome

SOLID PLUS

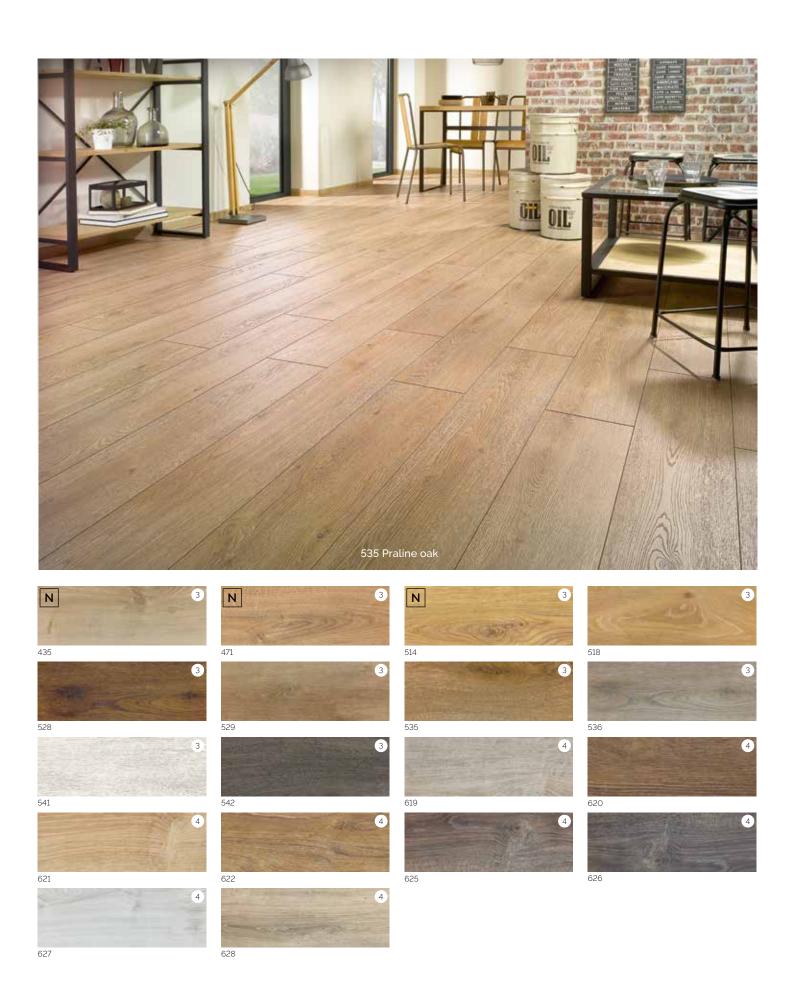

SOLID CHIC

AN ELEGANTLY SMART PLANK, 172MM WIDE, WHICH GOES WITH EVERY ROOM!





435

TECHNICAL FEATURES


length: 1286 mm

- Bevelled on the 4 sides.
- 12mm thickness: improved sound insulation.
- Easy installation, with the **5G** clip system.
- High resistance in **23/33 AC6**.





boards/kit: 6 sqm/kit: 1,33 weight/kit: 14 kg

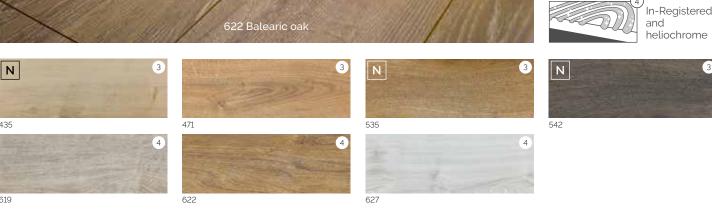


support: hdf - wp


width: 172 mm

SOLID MEDIUM

A SLIM PLANK, 122MM WIDE, IDEAL FOR SMALLER ROOMS

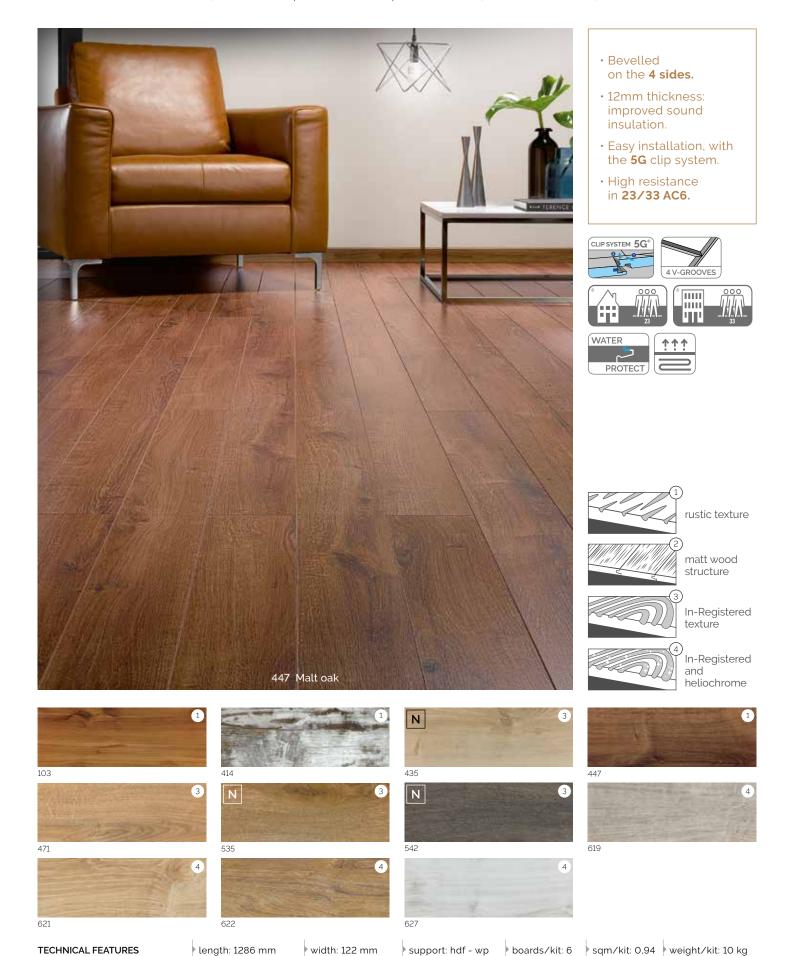

8 mm

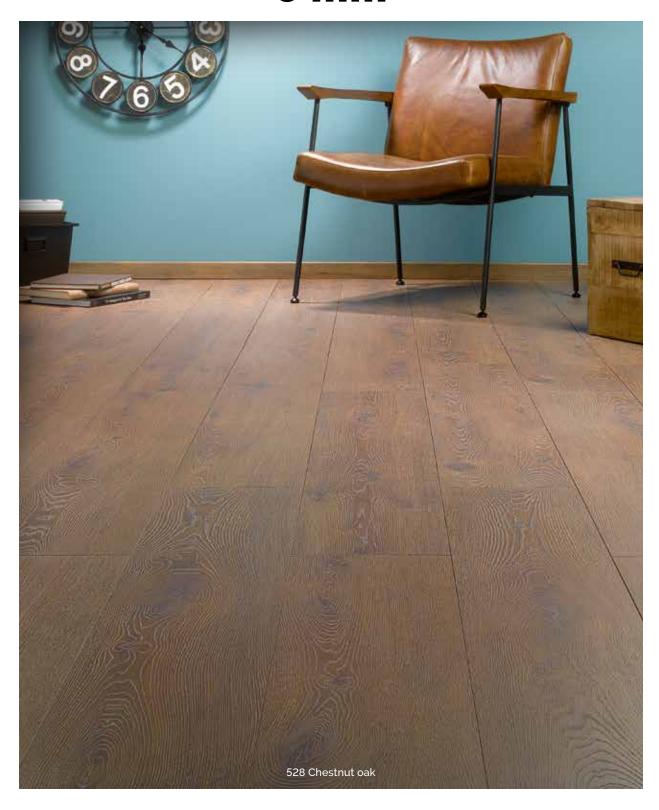

OSMOZE MEDIUM | OSMOZE | CLIP 400 | VINTAGE








OSMOZE MEDIUM

NEW IN 2019! OSMOZE NOW ALSO COMES IN SLIM PLANKS, 122MM WIDE

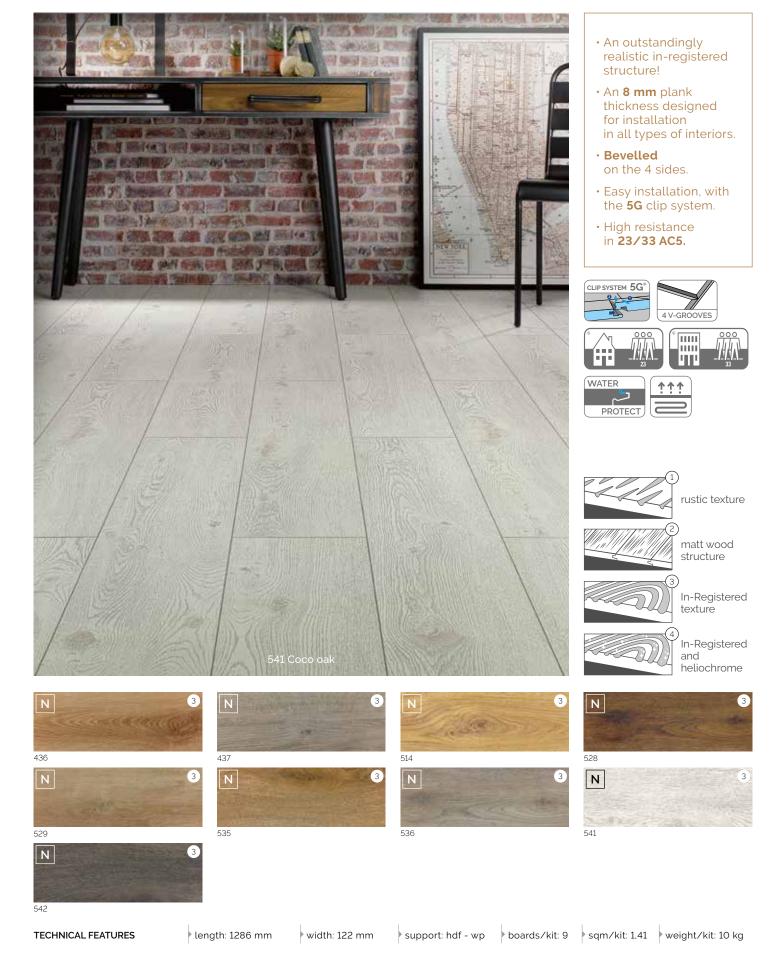


OSMOZE

AN IN-REGISTERED FINISH AND 4 BEVELS GIVE A HIGHLY REALISTIC PARQUET EFFECT



- An **8 mm** plank thickness designed for installation in all types of interiors.
- Bevelled on the 4 sides.
- ullet Easy installation, with the ${f 5G}$ clip system.
- High resistance in 23/33 AC5.





rustic texture








matt wood structure



In-Registered and heliochrome

support: hdf - wp

OSMOZE

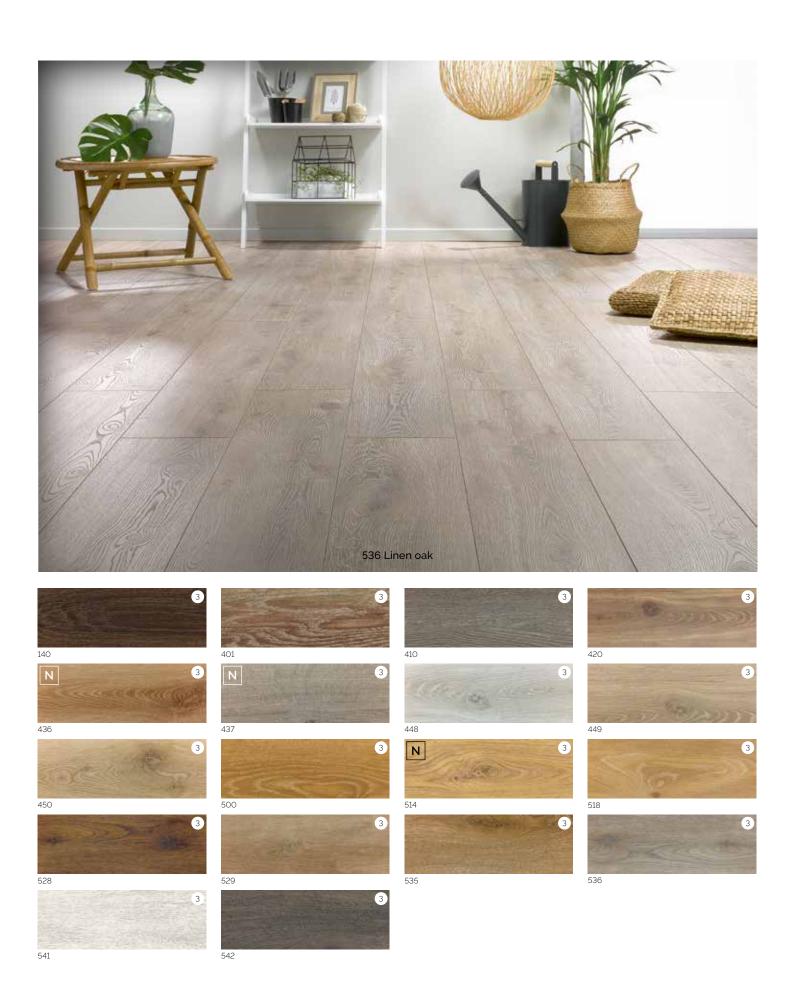


CLIP 400

A WIDE CHOICE OF COLOURS TO SUIT EVERY TYPE OF PROJECT.



- An **8 mm** plank thickness designed for installation in all types of interiors.
- Easy installation, with the **5G** clip system.
- High resistance in 23/33 AC5.





rustic texture



In-Registered texture




matt wood structure



In-Registered and heliochrome

CLIP 400

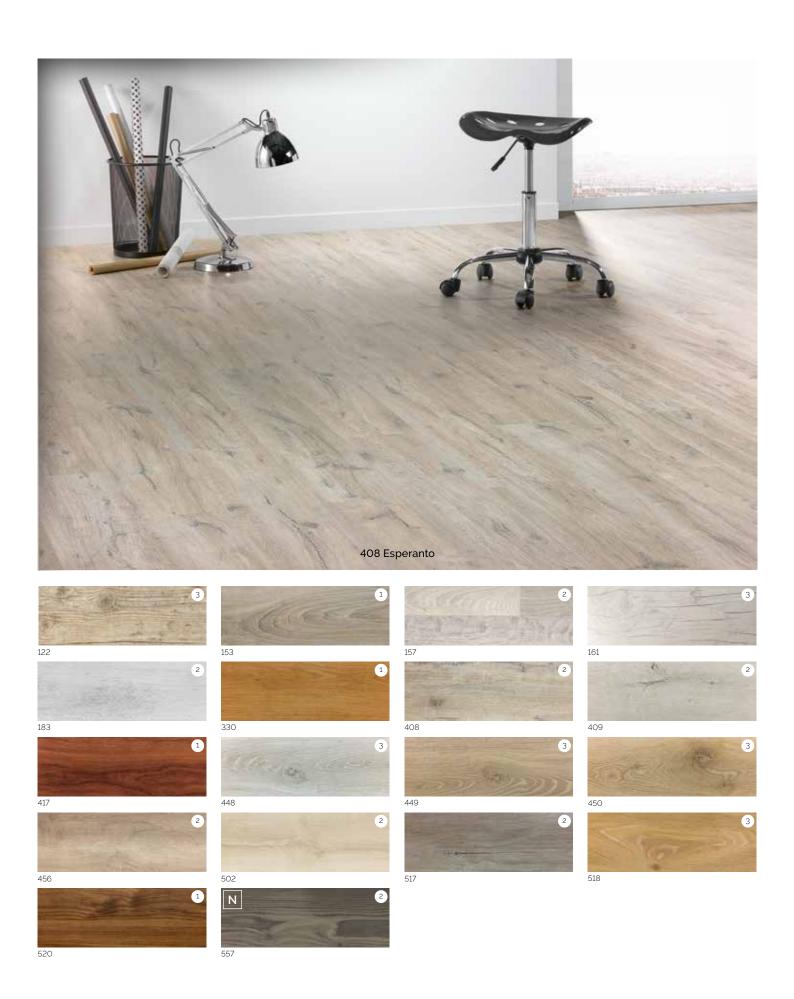

VINTAGE

UNIQUE, COLOURFUL PATTERNS!



- Bevelled on the 4 sides only for the 512 and 552 decors.
- · An **8 mm** plank thickness designed for installation in all types of interiors.
- Easy installation, with the **5G** clip system.
- High resistance in **23/33 AC5**.





Only for 512 and













rustic texture



matt wood structure



In-Registered texture



In-Registered and heliochrome









N 544









TECHNICAL FEATURES

length: 1286 mm

width: 192 mm

support: hdf - wp boards/kit: 9 sqm/kit: 2,22 weight/kit: 16 kg

PATTERNS














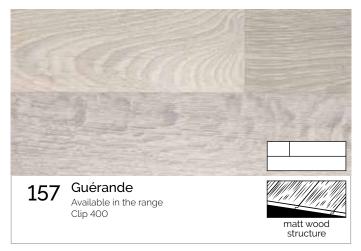













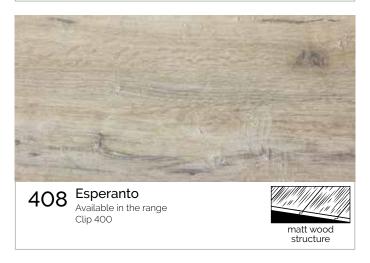





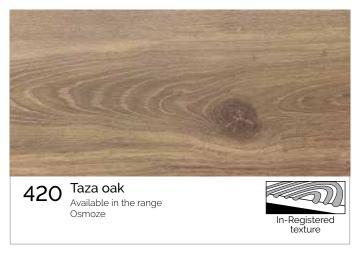















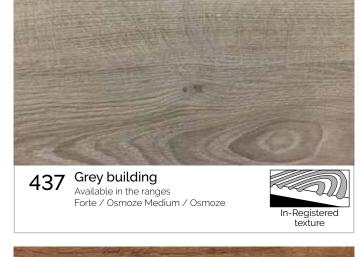
















matt wood structure

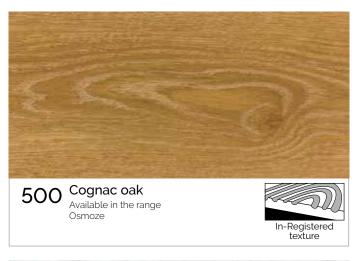




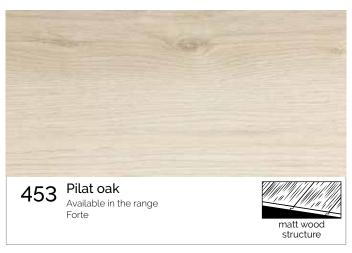






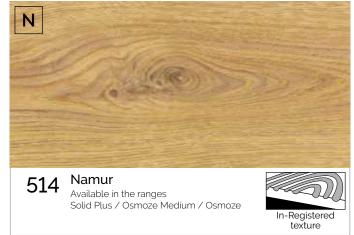



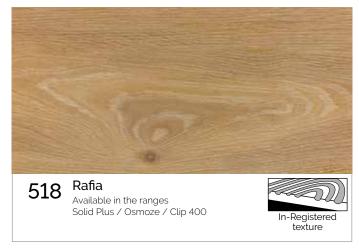

























































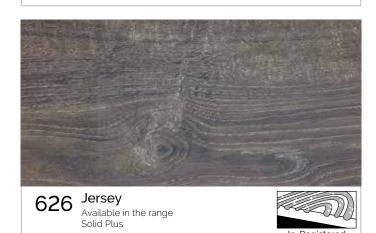



Structures







- And with oiled-finish surface for the decors: 528 / 529 / 535 / 536 / 541 / 542.



		The unusuals		12 mm			8 mm				
D	nacc										
	anges 019	Herringbone	Mix widths	Forte	Solid Plus	Solid Chic	Solid Medium	Osmoze Medium	Osmoze	Clip 400	Vintage
103	Authentic walnut						•				
122	Rustic pine									•	
140	Congo oak								•		
153	Celtic oak									•	
157	Guérande									•	
161	White pine									•	
183	Everest									•	
330	Landhausdiele oak									•	
401	Spanish oak								•		
408	Esperanto									•	
409	Cassandra			•						•	
410	Alpes' oak								•		
414	Vintage			•			•				N
417	Doussie Africa									•	
420	Taza oak								•		
435	Jefferson N	N	N		N	N	N	N	N		
436	Alpaca oak			•				N	N		
437	Grey building			•				N	N		
441	Lady oak			•			•				
447	Malt oak Grey oak			_					•	•	
449	Nevada oak								•	•	
450	Nature oak			•					•	•	
453	Pilat oak			•					-		
456	Provence oak									•	
471	Sunset	N	N		N	•	•				
500	Cognac oak								•		
502	White cotton									•	
512	White fiord N										N
514	Namur N				N			N	N		
517	White limed grey									•	
518	Rafia				•				•	•	
520	Chocolate walnut									•	
528	Chestnut oak				•			N	•		
529	Almond oak				•			N	•		
533	Cheverny										•
535	Praline oak	N	N		•	N	N	N	•		
536	Linen oak				•			N	•		
538	Batik										•
540	Inside			•							
541	Coco oak				•			N	•		
542	Aronia oak	N	N		•	N	N	N	•		[]
544	Wood stain oak										N
550	Trade wind N										N
552	Fado N										N
553	Black charleston N										N
554 557	Grey charleston N Black pine N									N	.,
619	Sardinia oak	•	•		•	•	•				
620	Corsica oak				•						
621	Canaries oak				•		•				
622	Balearic oak	•	•		•	•	•				
625	Corfou				•						
626	Jersey				•						
627	Polar oak	•	•		•	•	•				
628	Majorca oak				•						
_											

Technical features

		12 mm						
	RANGE OF PRODUCTS	Herringbone	Forte	Solid Plus	Solid Chic			
ES	Warranty	35 years	35 years	35 years	35 years			
IUR _	Profile and assembly	5G®	5G®	5G®	5G®			
FEATURES	Texture: surface aspect	← l	Depends on the de	ecor —				
	Bevels	4 Bevels	No	4 Bevels	4 Bevels			
	Quality		— DPL standard	· ————————————————————————————————————				
	Panel		— HDF - WP ⁽¹⁾					
	Total thickness in mm	12	12	12	12			
	Dimension of the board in mm	640 x 143	1286 x 214	1286 x 214	1286 x 172			
ESTS	Class of use	23/33	23/33	23/33	23/33			
<u> </u>	Abrasion resistance • EN 13329	AC6	AC6	AC6	AC6			
	Impact resistance • EN 13329	IC3	IC3	IC3	IC3			
	Resistance to chemical agents • EN 438	← Gr						
	Resistance to cigarettes burns • EN 438-2-18		—— Degree 4					
	Resistance to light effect • EN 438-2-16		— Degree ≥ 6 ⁽²⁾					
	Thermal resistance sqm K/W		≤ O,15 —					
	Substrate formaldehyde content • EN 120	← Inoffens	sive, E1 quality - 8	mg/100 g —				
	Laminate flooring formaldehyde emission • NF EN717-2	<	– E1 ≤ 3,5 mg/m².	h ————				
	Reaction to fire - Fire report • EN13501-1	←— Laminate flo	oring fitted with und	derlays included in i	the fire report: Cfl S1	_		
	Declaration of conformity – CE labeling CE ⁽³⁾	Yes	Yes	Yes	Yes			
	Traceability PEFC ⁽⁴⁾	Yes	Oui	Yes	Yes			
	Health safety labelling ⁽⁵⁾	\	– A+ Class —					
CS	Boards per kit	13	6	6	6			
LOGISTICS	Area per kit in sqm	1,19	1,65	1,65	1,33			
0	Weight per kit in kg	12,20	18	18	14			
	Kit packaging	box	box	box	box			
	Number of kit per pallet	60	48	48	52			
	Area per pallet in sqm	71,40	79,30	79,30	69			
	Weight pallet in kg	732	864	864	728			

	12mm	8 mm						
Solid Medium		Osmoze Medium	Osmoze	Clip 400	Vintage			
	35 years	25 years	25 years	25 years	25 years			
	5G®	5G®	5G®	5G®	5G®			
		——— Depends o	n the decor ———					
	4 Bevels	4 Bevels	4 Bevels	No	No (with 4 bevels for 512 and 552)			
		DPL	standard —					
		———— НЕ)F - WP ⁽¹⁾					
	12	8	8	8	8			
	1286 x 122	1286 x 122	1286 x 192	1286 x 192	1286 x 192			
	23/33	23/33	23/33	23/33	23/33			
	AC6	AC5	AC5	AC5	AC5			
	IC3	IC3	IC3	IC3	IC3			
		Group 1/2:5 - Group 3:4						
		Degree 4						
		≤ 0,15 —						
		Inoffensive, E1 c	quality - 8 mg/100 g					
		E1 ≤ 3,5 mg/m². h						
	Lam	inate flooring fitted w	ith underlays included	d in the fire report: Cfl	S1 —			
	Yes	Yes	Yes	Yes	Yes			
	Yes	Yes	Yes	Yes	Yes			
		A+ C	Class —					
	6	9	9	9	9			
	0,94	1,41	2,22	2,22	2,22			
	10	10	16	16	16			
	box	box	box	box	box			
	78	78	48	48	48			
	73,40	110,14	106,70	106,70	106,70			
	780	780	768	768	768			



This information is given for information purpose only and specifications are liable to change without warning.

(1) WP: Water protect

[.] Blue wool scale part BO2 ≥ 6. Grey scale, part AO2 ≥ 4.


⁽³⁾ EC marking declaration of conformity available on request on our website.
All our products comply with the EN 14041.

⁽⁴⁾ Our products are made from wood taken from sustainably managed forests.

⁽⁵⁾ Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).

For a better understanding

PRODUCT CROSS-SECTIONS

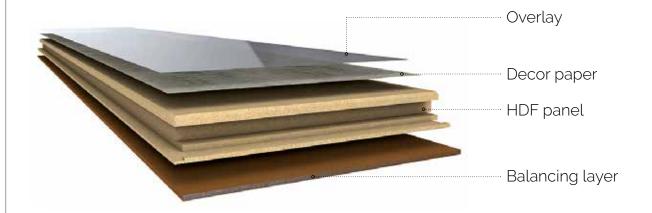

PICTOGRAMS TO MAKE LIFE EASIER!



Easy to clean



Suitable for laying with underfloor heating.



Dust-mites free



Panel average density






Classes of use: Heavy domestic and commercial use.



The wax layer on both sides of the joint creates a seal and prevents water inaress.



The boards are bevelled lengthwise and widthwise to produce an authentic look of the flooring of yesteryear. The joints are lacquered for easy cleaning and optimized tightness.



The 5G® locking system enables a significantly fast and easy installation. A reinforced plastic tongue on the short side of the floor panel results in a strong and robust locking, emitting a "click" sound and locking the planks vertically.



* Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C



The EC symbol on all our products certifies that they are produced in compliance with currently applicable standards and that they can move freely between countries within the European Community.



Our products are made from wood taken from sustainably managed forests and PEFC certified.

The accessories

DON'T FORGET THE ACCESSORIES, ESSENTIAL FOR LAYING DOWN ALSAPAN FLOORINGS!





Necessary for installation, we offer **underlays** to level the base floor and for acoustic and thermic insulation.

Coordinated with each **flooring design, skirting and profiles** bring the finishing touch that will make the difference.









Additional accessories: They ease the installation process.



For more information please see our **Accessories** catalogue

Engineered wood collection



TECHNICAL FEATURES

14mm thick engineered wood,

with a 3 mm oak surface-layer and 11 mm poplar core.

Long, wide planks,

with micro-bevelling along the 4 sides.

Easy installation, with clip system



Explore our **2019 Engineered wood** catalogue to see the full range.

Vinyl Collection



Designed, developed and made in France. Alsapan, with its 23 years' experience in manufacturing laminate flooring, has invested in a new vinyl flooring production line. Idéal is a high-performance rigid vinyl flooring with a standout design and a patented assembly system for easy fitting.





















Thickness

Waterproof

Compatible with undersoil heating

Rigid composite panel

osite onto ceramic tiles lel

Increased scratch resistance

Strain resistant

Built-in underlay

Transition noise reduction







DESTINATION ROOMS



PHTHALATE-FREE BUILT-IN UNDERLAY 33/42 HIGH RESISTANCE COMPATIBLE FOR CONSERVATORY FLOORS



Explore our 2019 Vinyl catalogue to see the full range.



ALSAFLOOR

Z.I. - 1 rue de l'Europe - 67521 Marlenheim Cedex - France tel. +33 (0)3 88 59 29 89 - fax. +33 (0)3 88 59 28 49

www.alsapan.com

